



Features

- Photoelectric isolation between control loop and load loop
- Zero-crossing output or random turn-on can be selected
- International Standardized Installation Dimensions
- LED indicates working status
- Built-in RC absorption circuit, strong anti-interference ability
- Epoxy resin potting, strong anti-corrosion and anti-explosion ability
- DC 3-32VDC or AC 90-280VAC input control

Ordering Options

VSE

VSE Series

Single Phase
Solid State Relay

40

Load Current

10: 10Amps
25: 25Amps
40: 40Amps
60: 60Amps
80: 80Amps
100: 100Amps
120: 120Amps

D

Control Voltage

D: 3-32VDC
A: 90-280VAC

A28

Output Voltage

A28: 24-280VAC
A48: 48-480VAC

Z

Switching Type


Z: Zero Cross Turn-on
R: Radom Turn-on

Product Selection

| Control voltage | Output Voltage | Rated operational current | | | | | | |
|-----------------|----------------|---------------------------|------------|------------|------------|------------|-------------|-------------|
| | | 10 Amps | 25Amps | 40Amps | 60 Amps | 80Amps | 100Amps | 120Amps |
| 3 to 32 Vdc | 280 VAC "Z" | VSE10DA28Z | VSE25DA28Z | VSE40DA28Z | VSE60DA28Z | VSE80DA28Z | VSE100DA28Z | VSE120DA28Z |
| 3 to 32 Vdc | 280 VAC "R" | VSE10DA28R | VSE25DA28R | VSE40DA28R | VSE60DA28R | VSE80DA28R | VSE100DA28R | VSE120DA28R |
| 90 to 280Vac | 280 VAC "Z" | VSE10AA28Z | VSE25AA28Z | VSE40AA28Z | VSE60AA28Z | VSE80AA28Z | VSE100AA28Z | VSE120AA28Z |
| 90 to 280Vac | 280 VAC "R" | VSE10AA28R | VSE25AA28R | VSE40AA28R | VSE60AA28R | VSE80AA28R | VSE100AA28R | VSE120AA28R |
| 3 to 32 Vdc | 480 VAC "Z" | VSE10DA48Z | VSE25DA48Z | VSE40DA48Z | VSE60DA48Z | VSE80DA48Z | VSE100DA48Z | VSE120DA48Z |
| 3 to 32 Vdc | 480 VAC "R" | VSE10DA48R | VSE25DA48R | VSE40DA48R | VSE60DA48R | VSE80DA48R | VSE100DA48R | VSE120DA48R |
| 90 to 280Vac | 480 VAC "Z" | VSE10AA48Z | VSE25AA48Z | VSE40AA48Z | VSE60AA48Z | VSE80AA48Z | VSE100AA48Z | VSE120AA48Z |
| 90 to 280Vac | 480 VAC "R" | VSE10AA48R | VSE25AA48R | VSE40AA48R | VSE60AA48R | VSE80AA48R | VSE100AA48R | VSE120AA48R |

Connection Diagram

1 Phase Load Control Connect

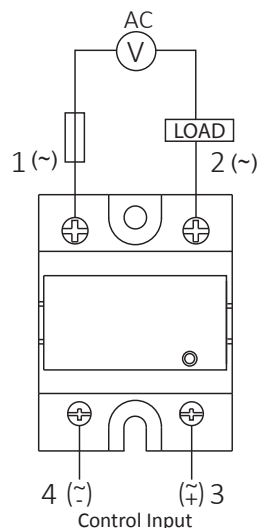


Input Specifications

| Parameter-list | Specification Limits | |
|------------------------|----------------------|---------------|
| Input Parameter | D | A |
| Control Voltage Range | 3 to 32Vdc | 90 to 280Vac |
| Input Current(Max.) | 13/16mAdc @=5V/12V | 30mAac @=220V |
| Must Turn On Voltage | 3Vdc | 90Vac |
| Must Turn Off Voltage | 1Vdc | 10Vac |
| Reverse Voltage (Max.) | 32Vdc | / |


Output Specifications

| Output Parameter | Units | Specification Limits | | | | | | | |
|---------------------------------|--------|-------------------------------------|------------|------------|------------|------------|-------------|-------------|--|
| Model No.:VSE | Amp | 10 | 25 | 40 | 60 | 80 | 100 | 120 | |
| Load Current Range | Arms | 0.05 to 10 | 0.05 to 25 | 0.05 to 40 | 0.05 to 60 | 0.05 to 80 | 0.05 to 100 | 0.05 to 120 | |
| Surge Current 20mSec(Max.) | Arms | 85 | 230 | 400 | 600 | 1000 | 1200 | 1500 | |
| Load Voltage Range(240V) | Vrms | 24 to 280 | | | | | | | |
| TRIAC Over voltage(240V) | Vpk | ≥600 | | | | | | | |
| Load Voltage Range(480V) | Vrms | 48 to 480 | | | | | | | |
| TRIAC Over voltage(480V) | Vpk | ≥800 | | | | | | | |
| Frequency Range | Hz | 47 to 63 | | | | | | | |
| Off State dv/dt (Min.) | V/μsec | 200 | 200 | 200 | 500 | 500 | 500 | 500 | |
| Off State Leakage Current(Max.) | mArms | ≤8 | | | | | | | |
| On State Voltage Drop(Max.) | Vrms | 1.6 | 1.6 | 1.6 | 1.8 | 1.8 | 1.8 | 1.8 | |
| Thermal Resistance,(Rthjc) | | 2.5 | 2.5 | 1.3 | 0/65 | 0.5 | 0.3 | 0.3 | |
| Turn On Time (Max.)"Z" | Cycle | 1/2 | | | | | | | |
| Turn On Time (Max.)"R" | mSec | 1 | | | | | | | |
| Turn Off Time (Max.) | Cycle | 1/2 | | | | | | | |
| Turn Off Time (Max.)"A" | mSec | 40 | | | | | | | |
| Dielectric (Input/Output) | Vrms | 2500 | | | | | | | |
| Dielectric (Input-Output/Base) | Vrms | 2500 | | | | | | | |
| Capacitance | pf | 10 | | | | | | | |
| Ambient Temperature Range | | Operating or Storage -30°C to +80°C | | | | | | | |
| Led Display | | Yes | | | | | | | |

Dimensions

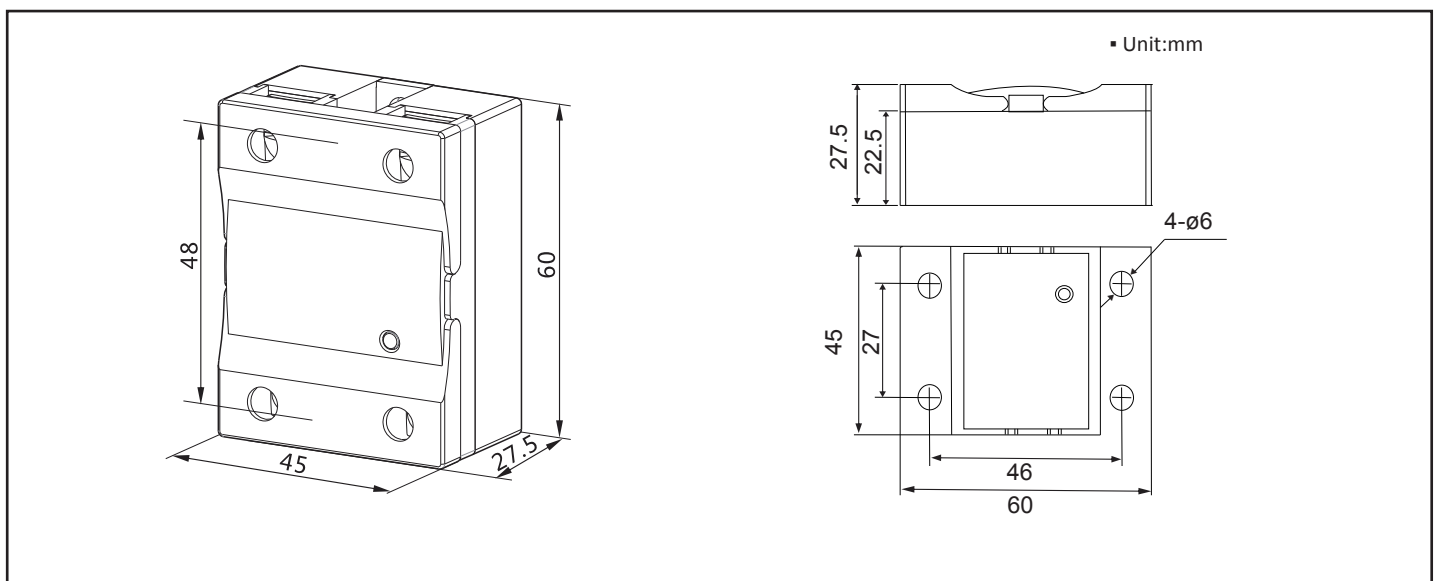

Thermal Derating Curve

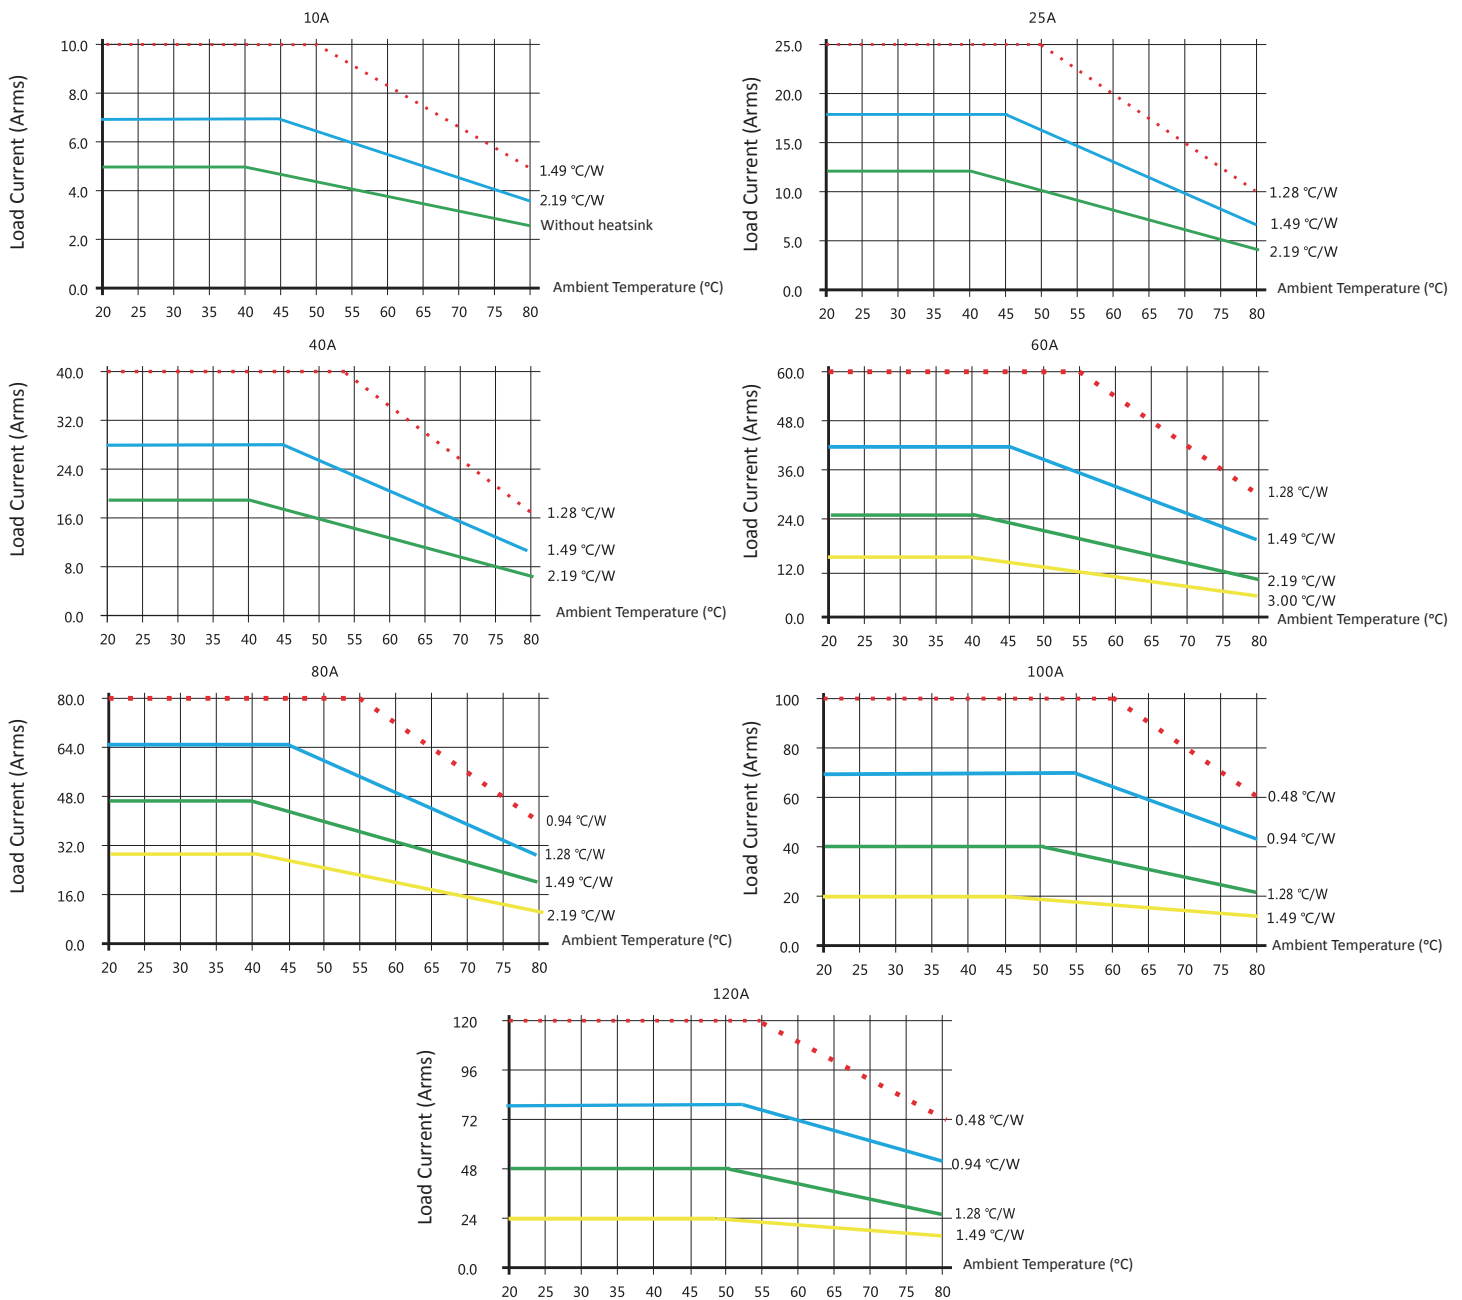



Important Notice

Enter working conditions:

- ◆ Pay attention to the range of working voltage and the positive and negative poles.
- ◆ In order to ensure the normal operation of the solid state relay, the input current should be increased when the ambient temperature is low, and the input current should be reduced when the temperature is high.
- ◆ When using the integrated circuit to directly drive the SSR, it should have sufficient load capacity and output as low as possible "0" level.

Output working conditions:

- ◆ In order to ensure the reliable operation of the SSR, the limit parameters of the SSR must be correctly used and necessary protective measures must be taken.
- ◆ Peak voltage selection: inductive load; take the line voltage (effective value) indeed 1-3. Pure resistance load: take 1-2 times the line voltage (RMS).
- ◆ Selection of varistor: The nominal working voltage value of varistor is selected according to the effective 1.8-2 times of SSR working voltage.
- ◆ Products with a working current of less than 5A should be installed next to a well-ventilated heat-dissipating window, or where natural wind can blow.
- ◆ Products with a working current above 10A must be installed with a radiator, and thermal grease can be added between the relay and the radiator for good heat dissipation. When the surface temperature of the radiator is close to 60°C, forced air cooling should be used.
- ◆ In order to prevent the temperature rise of the solid state relay from exceeding the allowable value, the heat dissipation effect and installation position should be fully considered in the design and application. When two or more solid state relays are installed side by side, an appropriate gap should be left.

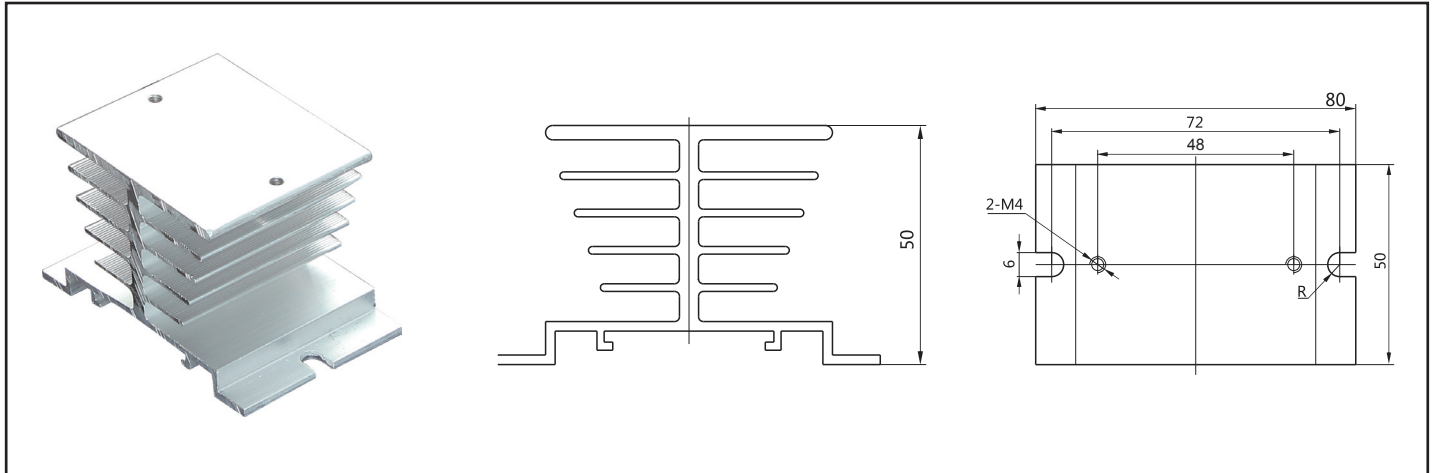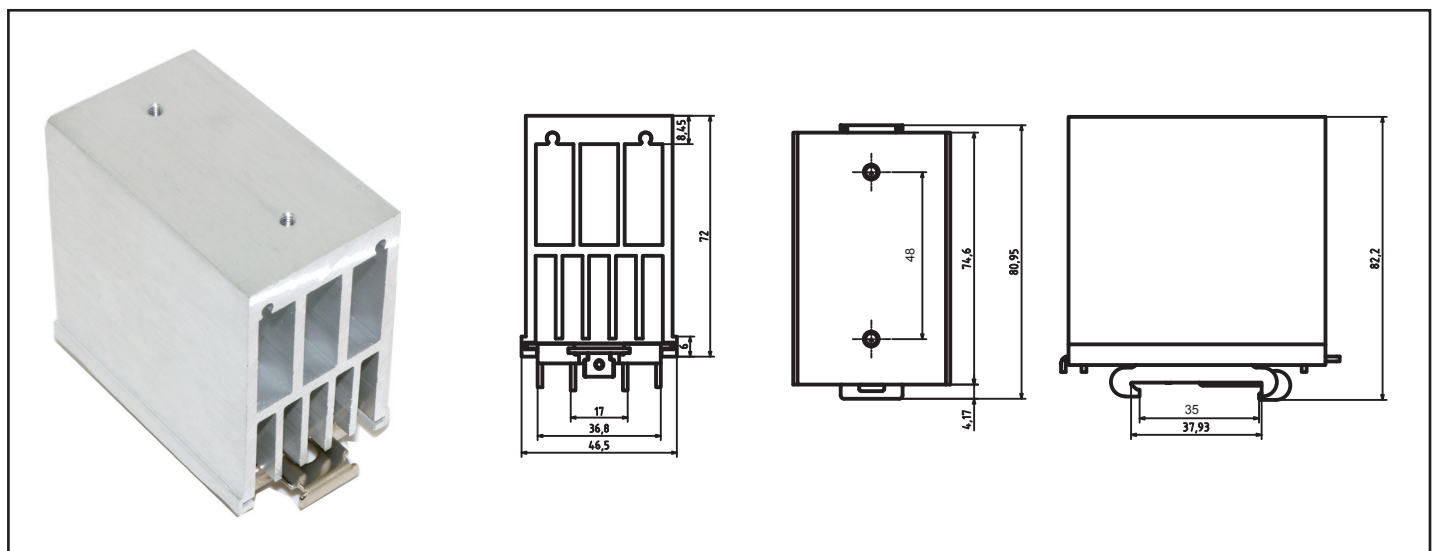Solid State Relay Heatsink
VSR-1 (For VSE10A-40A)

VSR-2 (For VSE10A-80A)

VSR-3 (For VSE10A-120A)
