



Features

- Photoelectric isolation between control loop and load loop
- Zero-crossing output or random turn-on can be selected
- International Standardized Installation Dimensions
- LED indicates working status
- Built-in RC absorption circuit, strong anti-interference ability
- Epoxy resin potting, strong anti-corrosion and anti-explosion ability
- DC 3-32VDC or AC 90-280VAC input control

Ordering Options

VSR

VSR Series

Single Phase
Solid State Relay

40

Load Current

10: 10Amps
25: 25Amps
40: 40Amps
60: 60Amps
80: 80Amps
100: 100Amps
120: 120Amps

D

Control Voltage

D: 3-32VDC
A: 90-280VAC

A28

Output Voltage

A28: 24-280VAC
A48: 48-480VAC

Z

Switching Type


Z: Zero Cross Turn-on
R: Radom Turn-on

Product Selection

Control voltage	Output Voltage	Rated operational current						
		10 Amps	25Amps	40Amps	60 Amps	80Amps	100Amps	120Amps
3 to 32 Vdc	280 VAC "Z"	VSR10DA28Z	VSR25DA28Z	VSR40DA28Z	VSR60DA28Z	VSR80DA28Z	VSR100DA28Z	VSR120DA28Z
3 to 32 Vdc	280 VAC "R"	VSR10DA28R	VSR25DA28R	VSR40DA28R	VSR60DA28R	VSR80DA28R	VSR100DA28R	VSR120DA28R
90 to 280Vac	280 VAC "Z"	VSR10AA28Z	VSR25AA28Z	VSR40AA28Z	VSR60AA28Z	VSR80AA28Z	VSR100AA28Z	VSR120AA28Z
90 to 280Vac	280 VAC "R"	VSR10AA28R	VSR25AA28R	VSR40AA28R	VSR60AA28R	VSR80AA28R	VSR100AA28R	VSR120AA28R
3 to 32 Vdc	480 VAC "Z"	VSR10DA48Z	VSR25DA48Z	VSR40DA48Z	VSR60DA48Z	VSR80DA48Z	VSR100DA48Z	VSR120DA48Z
3 to 32 Vdc	480 VAC "R"	VSR10DA48R	VSR25DA48R	VSR40DA48R	VSR60DA48R	VSR80DA48R	VSR100DA48R	VSR120DA48R
90 to 280Vac	480 VAC "Z"	VSR10AA48Z	VSR25AA48Z	VSR40AA48Z	VSR60AA48Z	VSR80AA48Z	VSR100AA48Z	VSR120AA48Z
90 to 280Vac	480 VAC "R"	VSR10AA48R	VSR25AA48R	VSR40AA48R	VSR60AA48R	VSR80AA48R	VSR100AA48R	VSR120AA48R

Connection Diagram

1 Phase Load Control Connect

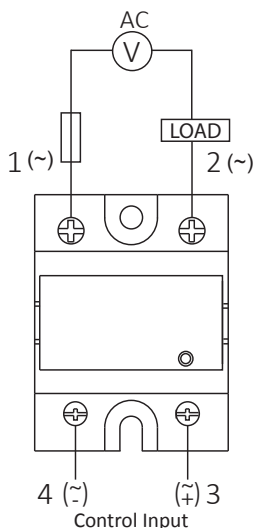


Input Specifications

Parameter-list	Specification Limits	
Input Parameter	D	A
Control Voltage Range	3 to 32Vdc	90 to 280Vac
Input Current(Max.)	13/16mAdc @=5V/12V	30mAac @=220V
Must Turn On Voltage	3Vdc	90Vac
Must Turn Off Voltage	1Vdc	10Vac
Reverse Voltage (Max.)	32Vdc	/


Output Specifications

Output Parameter	Units	Specification Limits						
Model No.:VSR	Amp	10	25	40	60	80	100	120
Load Current Range	Arms	0.05 to 10	0.05 to 25	0.05 to 40	0.05 to 60	0.05 to 80	0.05 to 100	0.05 to 120
Surge Current 20mSec(Max.)	Arms	85	230	400	600	1000	1200	1500
Load Voltage Range(240V)	Vrms	24 to 280						
TRIAC Over voltage(240V)	Vpk	≥600						
Load Voltage Range(480V)	Vrms	48 to 480						
TRIAC Over voltage(480V)	Vpk	≥800						
Frequency Range	Hz	47 to 63						
Off State dv/dt (Min.)	V/μsec	200	200	200	500	500	500	500
Off State Leakage Current(Max.)	mArms	≤8						
On State Voltage Drop(Max.)	Vrms	1.6	1.6	1.6	1.8	1.8	1.8	1.8
Thermal Resistance,(Rthjc)		2.5	2.5	1.3	0/65	0.5	0.3	0.3
Turn On Time (Max.)"Z"	Cycle	1/2						
Turn On Time (Max.)"R"	mSec	1						
Turn Off Time (Max.)	Cycle	1/2						
Turn Off Time (Max.)"A"	mSec	40						
Dielectric (Input/Output)	Vrms	2500						
Dielectric (Input-Output/Base)	Vrms	2500						
Capacitance	pf	10						
Ambient Temperature Range	Operating or Storage -30°C to +80°C							
Led Display	Yes							

Dimensions

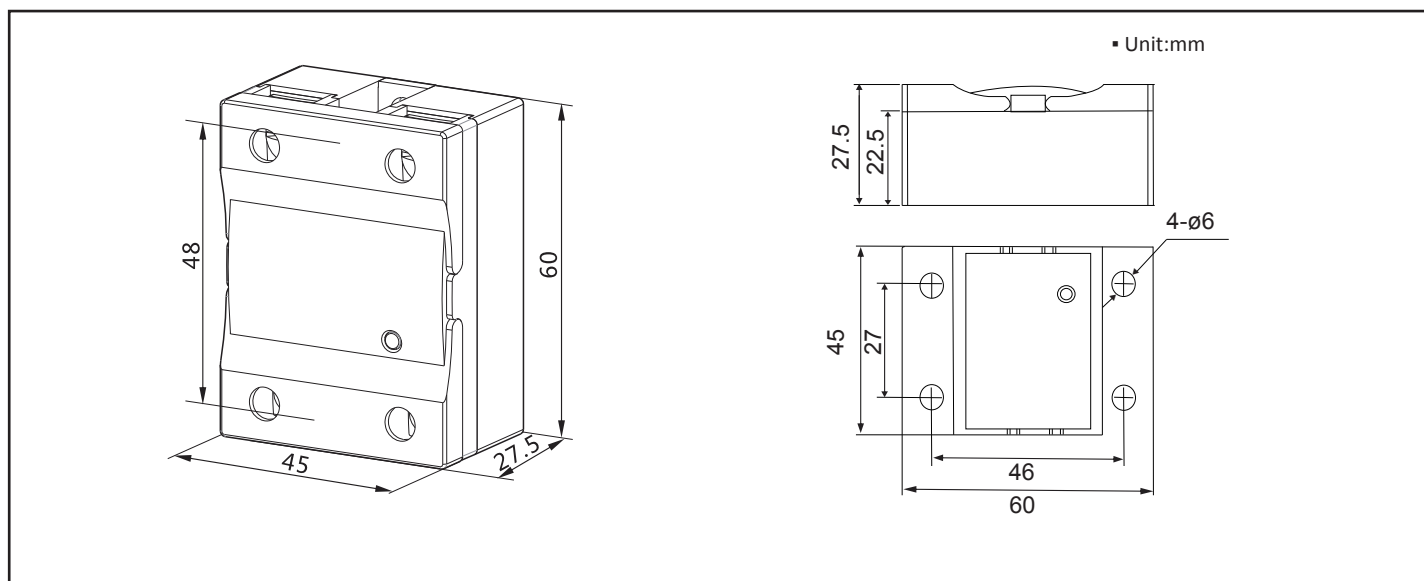

Thermal Derating Curve

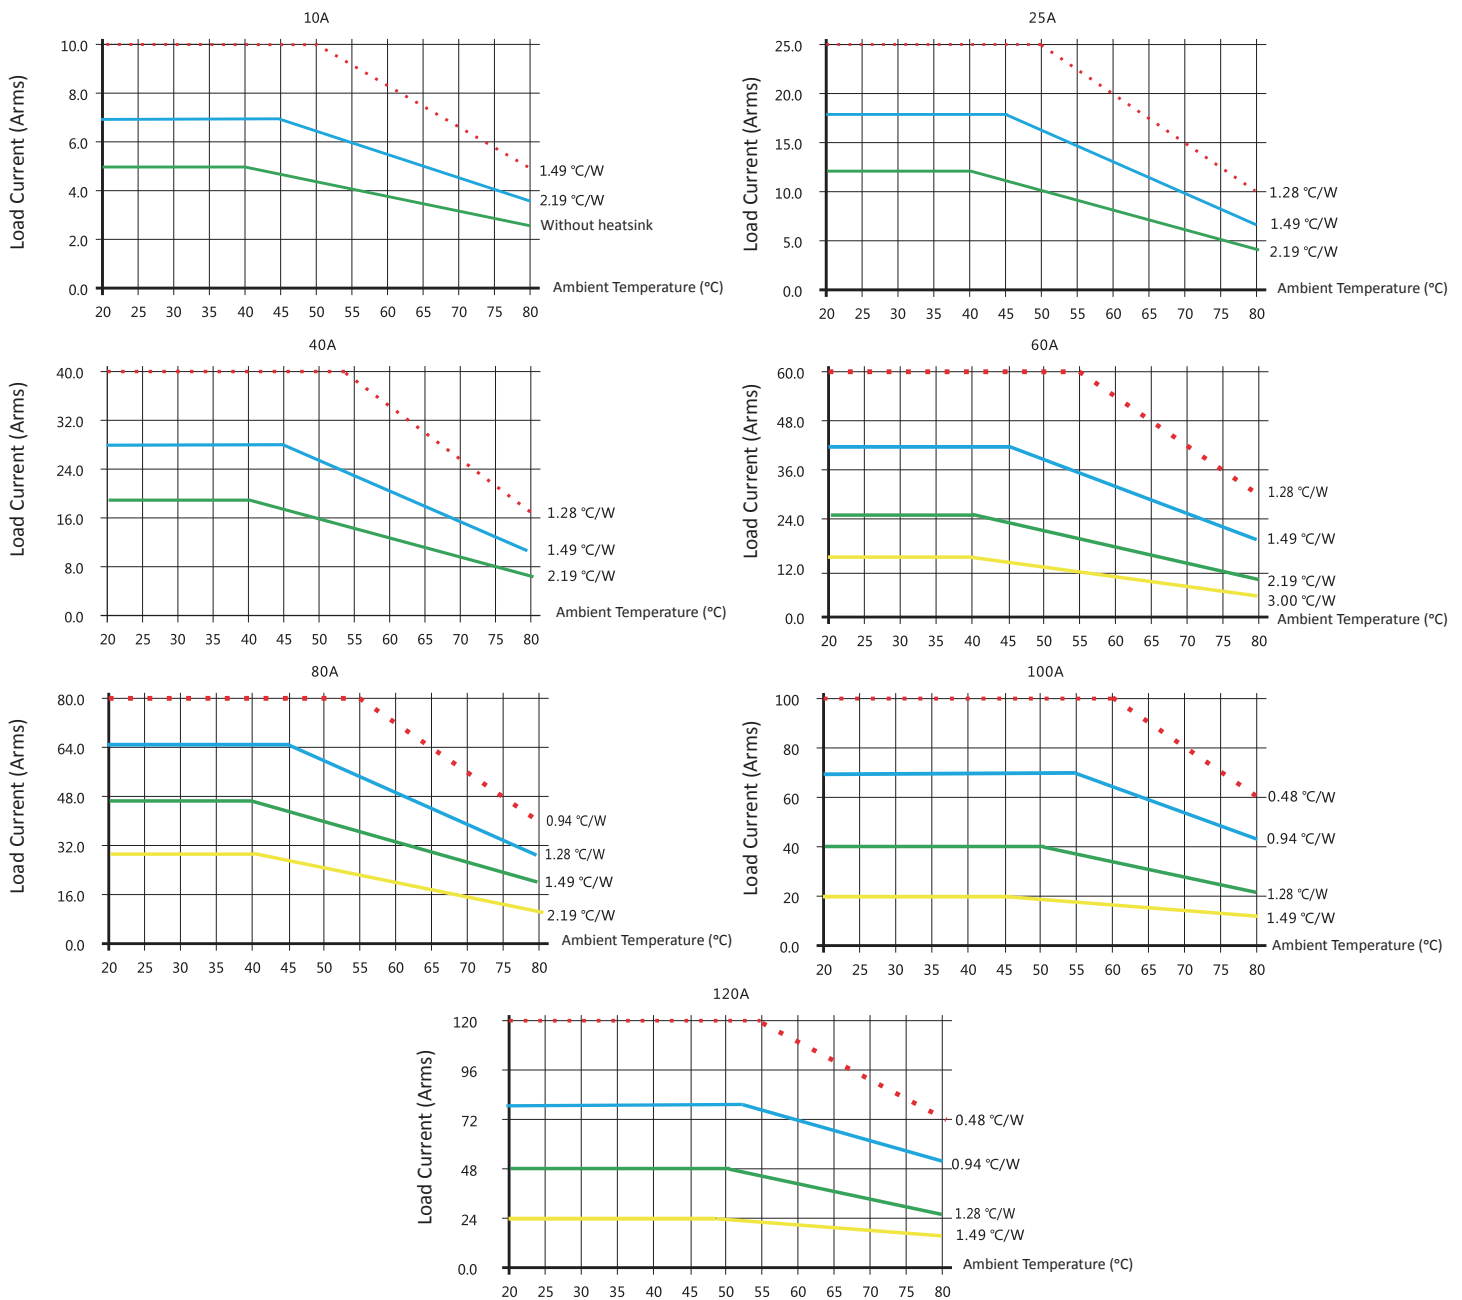



Important Notice

Enter working conditions:

- ◆ Pay attention to the range of working voltage and the positive and negative poles.
- ◆ In order to ensure the normal operation of the solid state relay, the input current should be increased when the ambient temperature is low, and the input current should be reduced when the temperature is high.
- ◆ When using the integrated circuit to directly drive the SSR, it should have sufficient load capacity and output as low as possible "0" level.

Output working conditions:

- ◆ In order to ensure the reliable operation of the SSR, the limit parameters of the SSR must be correctly used and necessary protective measures must be taken.
- ◆ Peak voltage selection: inductive load; take the line voltage (effective value) indeed 1-3. Pure resistance load: take 1-2 times the line voltage (RMS).
- ◆ Selection of varistor: The nominal working voltage value of varistor is selected according to the effective 1.8-2 times of SSR working voltage.
- ◆ Products with a working current of less than 5A should be installed next to a well-ventilated heat-dissipating window, or where natural wind can blow.
- ◆ Products with a working current above 10A must be installed with a radiator, and thermal grease can be added between the relay and the radiator for good heat dissipation. When the surface temperature of the radiator is close to 60°C, forced air cooling should be used.
- ◆ In order to prevent the temperature rise of the solid state relay from exceeding the allowable value, the heat dissipation effect and installation position should be fully considered in the design and application. When two or more solid state relays are installed side by side, an appropriate gap should be left.

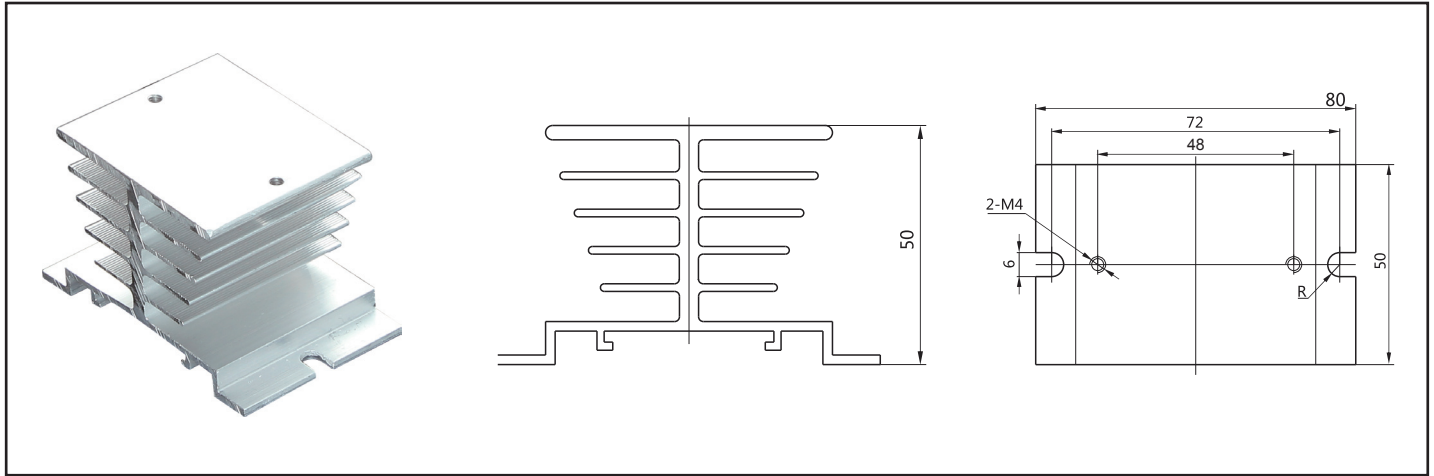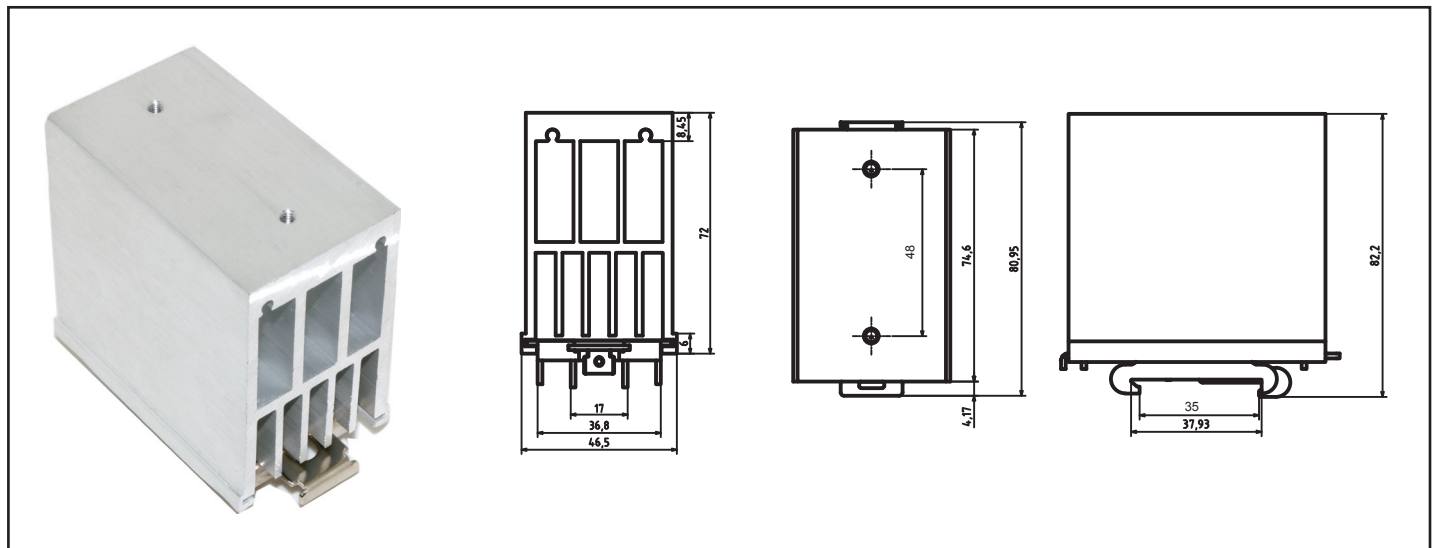Solid State Relay Heatsink
VSR-1 (For VSR10A-40A)

VSR-2 (For VSR10A-80A)

VSR-3 (For VSR10A-120A)
